

SMARTCARD DIVISION

ST19XL34 SECURITY TARGET

COMMON CRITERIA FOR IT SECURITY EVALUATION



TABLE OF CONTENTS

| | |
|--|-----------|
| 1 INTRODUCTION | 5 |
| 1.1 IDENTIFICATION | 5 |
| 1.2 PURPOSE | 5 |
| 1.3 CONTEXT | 5 |
| 1.4 COMMON CRITERIA CONFORMANCE CLAIMS | 6 |
| 2 ST19XL34 TOE DESCRIPTION | 7 |
| 2.1 ST19XL34 TECHNICAL PARAMETERS | 7 |
| 2.2 SECURE IC BASED PRODUCT LIFE-CYCLE | 9 |
| 2.3 TOE ENVIRONMENT | 11 |
| 2.4 TOE LOGICAL PHASES | 12 |
| 2.5 TOE INTENDED USAGE | 12 |
| 2.6 General IT features of the TOE | 13 |
| 3 TOE SECURITY ENVIRONMENT | 14 |
| 3.1 ASSETS | 14 |
| 3.2 ASSUMPTIONS | 14 |
| 3.3 THREATS | 14 |
| 3.4 ORGANISATIONAL SECURITY POLICIES | 15 |
| 4 SECURITY OBJECTIVES | 16 |
| 4.1 SECURITY OBJECTIVES FOR THE TOE | 16 |
| 4.2 SECURITY OBJECTIVES FOR THE ENVIRONMENT | 17 |
| 5 TOE SECURITY FUNCTIONAL REQUIREMENTS | 18 |
| 5.1 SUBJECTS, OBJECTS, OPERATIONS AND DATA | 18 |
| 5.2 FUNCTIONAL REQUIREMENTS APPLICABLE TO TST&ISR | 20 |
| 5.3 FUNCTIONAL REQUIREMENTS APPLICABLE TO PHASES 3 TO 7 | 20 |
| 5.4 FUNCTIONAL REQUIREMENTS APPLICABLE TO USER CONFIGURATION | 24 |
| 6 TOE SECURITY ASSURANCE REQUIREMENTS | 27 |
| 6.1 ASE: SECURITY TARGET EVALUATION CLASS | 27 |
| 6.2 ADV_FSP.3 SEMIFORMAL FUNCTIONAL SPECIFICATION | 27 |
| 6.3 ADV_IMP.2 Implementation of the TSF | 27 |
| 6.4 ALC_DVS.2 Sufficiency of security measures | 28 |
| 6.5 ALC_FLR.1 BASIC FLAW REMEDIATION | 28 |
| 6.6 AVA_VLA.4 Highly resistant | 29 |
| 6.7 AVA_CCA.1: COVERT CHANNEL ANALYSIS | 30 |
| 7 TOE SUMMARY SPECIFICATION | 31 |
| 7.1 STATEMENT OF TOE SECURITY FUNCTIONS | 31 |
| 7.2 STATEMENT OF ASSURANCE MEASURES | 34 |
| 8 PP CLAIMS | 35 |
| 8.1 PP REFERENCES | 35 |
| 8.2 PP REFINEMENTS | 35 |

8.3 PP ADDITIONS 35

9 RATIONALE 37

10 REFERENCES 38

ANNEX A GLOSSARY 39

ANNEX B ABBREVIATIONS 42

LIST OF FIGURES

| | | |
|----------|--|----|
| Figure 1 | ST19XL34 block diagram | 8 |
| Figure 2 | Secure IC based product life-cycle | 10 |

LIST OF TABLES

Table 1 Secure IC based product authorities by life-cycle phase 9
Table 2 TOE configurations 12



ST19XL34 SECURITY TARGET

COMMON CRITERIA FOR IT SECURITY EVALUATION

1 INTRODUCTION

1.1 Identification

- 1 Document identification: ST19XL34 SECURITY TARGET.
- 2 Version number: V1_00, issued in July 2004.
- 3 Registration: registered at ST Microelectronics under number SMD_ST19XL34_ST_04_001_V1.00.
- 4 TOE identification: given in [Chapter 2](#).

1.2 Purpose

- 5 This document presents **the ST19XL34 Security Target (ST)** of Smartcard Integrated Circuit (IC), with its Dedicated Software (DSW), designed on the **ST19X platform of STMicroelectronics**.
- 6 This document is a sanitized version of the Security Target used for the evaluation. Its purpose is the conformance to the Common Criteria Recognition Agreement (CC RA). It is classified as public information.
- 7 The precise references of the Target of Evaluation (TOE) and the secure IC general features are given in [Chapter 2](#).
- 8 A glossary of terms and abbreviations used in this document is given in Annex A and Annex B

1.3 Context

- 9 The Target of Evaluation (TOE) referred in [Chapter 2](#), is evaluated under the French IT Security Evaluation and Certification Scheme and is developed by the Smartcard product division of STMicroelectronics (STM).
- 10 The assurance level of the performed Common Criteria (CC) IT Security Evaluation is EAL 4 augmented. The minimum strength level for the TOE Security Functions (SFs) is SOF-high for all the security functions implemented by the TOE.
- 11 The intent of this ST is to specify the Security Functional Requirements (SFRs) and Security Assurance Requirements (SARs) applicable to the ST19XL34 secure IC, and to summarise its chosen SFs and assurance measures.
- 12 This ST claims to be an **extended** instantiation of the "[Smartcard Integrated Circuit](#)" Protection Profile (PP) registered and certified under the reference [PP/9806](#) in the French IT Security Evaluation and Certification Scheme.

- 13 Extensions to the SFRs of the "[Smartcard Integrated Circuit](#)" Protection Profile (PP) are **exclusively** drawn from the Common Criteria part 2 standard SFRs.
- 14 This ST makes various refinements to the above mentioned PP. They are all properly identified in the text as they appear **as indicated here**. The original text of the PP is repeated in this document for reading convenience. It is easily identified as it appears [as indicated here](#). The deleted text of these paragraphs appears [\[as indicated here\]](#).

1.4 Common Criteria conformance claims

- 15 The ST19XL34 Security Target is:
- [PP/9806](#) conformant,
 - EAL4 augmented by **ADV_FSP.3**, ADV_IMP.2, ALC_DVS.2, **ALC_FLR.1**, AVA_VLA.4 and **AVA_CCA.1**,
 - The minimum strength of functions level for the SFRs is **SOF-high**,
 - [ISO/IEC 15408-2:1999](#) conformant,
 - [ISO/IEC 15408-3:1999](#) conformant.
- 16 The following CC "final interpretations" concerning the ASE security assurance requirement component were taken into account (source <http://www.commoncriteria.org>):


| Interpretation Number | Effective Date | Interpretation Title | Reference: CC | Reference: CEM |
|-----------------------|----------------|--|---|---|
| 008 | 31/07/01 | Augmented and Conformant overlap | CCv2.1 Part 1 Section 5.4 | CEM Part 2 v1.0 ASE_INT |
| 032 | 15/10/00 | Strength of Function Analysis in ASE_TSS | CCv2.0, CC v2.1; Part 1, Annex C; Part 3, ASE_TSS | |
| 043 | 16/02/01 | What does "clearly stated" mean? | CC v2.1 Part 3 APE_OBJ.1, ASE_OBJ.1 | |
| 049 | 16/02/01 | Not Completely met | CC v2.1 Part 1 Annex B/C.2.5, Part 3 APE/ ASE_OBJ.1.3C | |
| 084 | 16/02/01 | Aspects of objectives in TOE and environment | | CEM Part 2, v1.0, APE_REQ.1-20, ASE_REQ.1-20 |

2 ST19XL34 TOE DESCRIPTION

2.1 ST19XL34 TECHNICAL PARAMETERS

- 17 This section describes the ST19XL34 product as assembly of the highly reliable CMOS ST19X platform.
- 18 The general features of the circuit are :
- 8-bit processing unit
 - volatile (SRAM) and non volatile memories (ROM and EEPROM)
 - Security blocks : Memory Access Control Logic (MACL), clock generator, security administrator, power manager
 - supporting functions : I/O ports (contact only), 8-bit timers, Unpredictable Number Generator.
- 19 The TOE also includes in the ROM A Dedicated Software which comprises test capabilities (test operating system, called "autotest") and libraries (System ROM library, cryptographic library for DES (EDES implementation) and RSA algorithms)
- 20 The TOE is a silicon chip with its Dedicated Software
- 21 The TOE submitted to evaluation does not comprise any specific application : there is no applicative Embedded Software but the ROM of the tested samples contains an operating system called "Card Manager" that allows the evaluators to use a set of commands with the I/O and to load in EEPROM (or in RAM) test softwares.
- 22 Figure 1 provides a block diagram overview of the ST19XL34

Figure 1 ST19XL34 block diagram

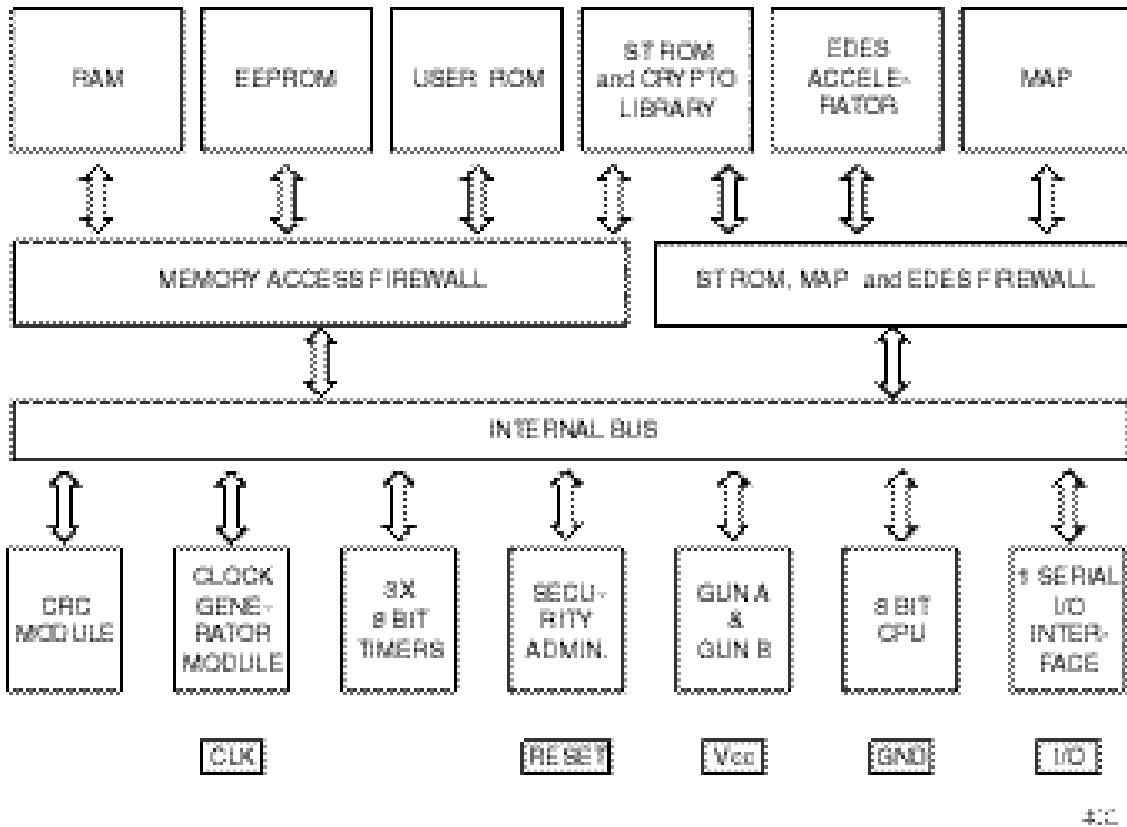

2.2 SECURE IC BASED PRODUCT LIFE-CYCLE

23 The **secure IC based product** life-cycle is decomposed into 7 phases.

24 The authorities involved in each phase are described in [Table 1](#).

25 The **limit of the evaluation** defines the scope of responsibility of STM in terms of security. This limit is defined by the parameter `C_DELIVERY_PHASE`. This parameter takes the value 3 for deliveries in the form of wafers, either unsawn or sawn (dice).


26 The limit of **the evaluation** corresponds to phases 2 **through** `C_DELIVERY_PHASE`, including the delivery and verification procedures of phase 1, and the TOE delivery to the phase `C_DELIVERY_PHASE` **authority**; procedures corresponding to **all other phases** are outside the scope of this **evaluation**.

27 Figure 2 describes the secure IC based product life cycle.

Table 1 Secure IC based product authorities by life-cycle phase

| Phase | Name, authority and description | |
|-------|---|---|
| 1 | <p>Secure IC embedded software development: the secure IC embedded software developer is in charge of the secure IC embedded software development and the specification of IC pre-personalization requirements.</p> | |
| 2 | <p>IC development: STM designs the IC, develops IC dedicated software, provides information, software or tools to the secure IC embedded software developer, and receives the secure IC embedded software from the developer, through trusted delivery and verification procedures. From the IC design, IC dedicated software and secure IC embedded software, he constructs the secure IC database, necessary for the IC photomask fabrication.</p> | |
| 3 | <p>IC manufacturing and testing: STM is responsible for producing the IC through three main steps: IC manufacturing, IC testing, and IC pre-personalization.</p> | |
| Phase | Name, authority and description when <code>C_DELIVERY_PHASE=3</code> | Name, authority and description when <code>C_DELIVERY_PHASE=4</code> |
| 4 | <p>IC packaging and testing: the IC packaging manufacturer is responsible for the IC packaging and testing.</p> | <p>STM is responsible for the IC packaging and testing.</p> |
| 5 | <p>Secure IC product finishing process: the secure IC product manufacturer is responsible for the secure IC product finishing process and testing.</p> | |
| 6 | <p>Secure IC personalization: the personalizer is responsible for the secure IC personalization and final tests. Other secure IC embedded software may be loaded onto the chip in the personalization process.</p> | |
| 7 | <p>Secure IC end-usage: the secure IC issuer is responsible for the secure IC product delivery to the secure IC end-user and for the end of life process.</p> | |

Figure 2 Secure IC based product life-cycle

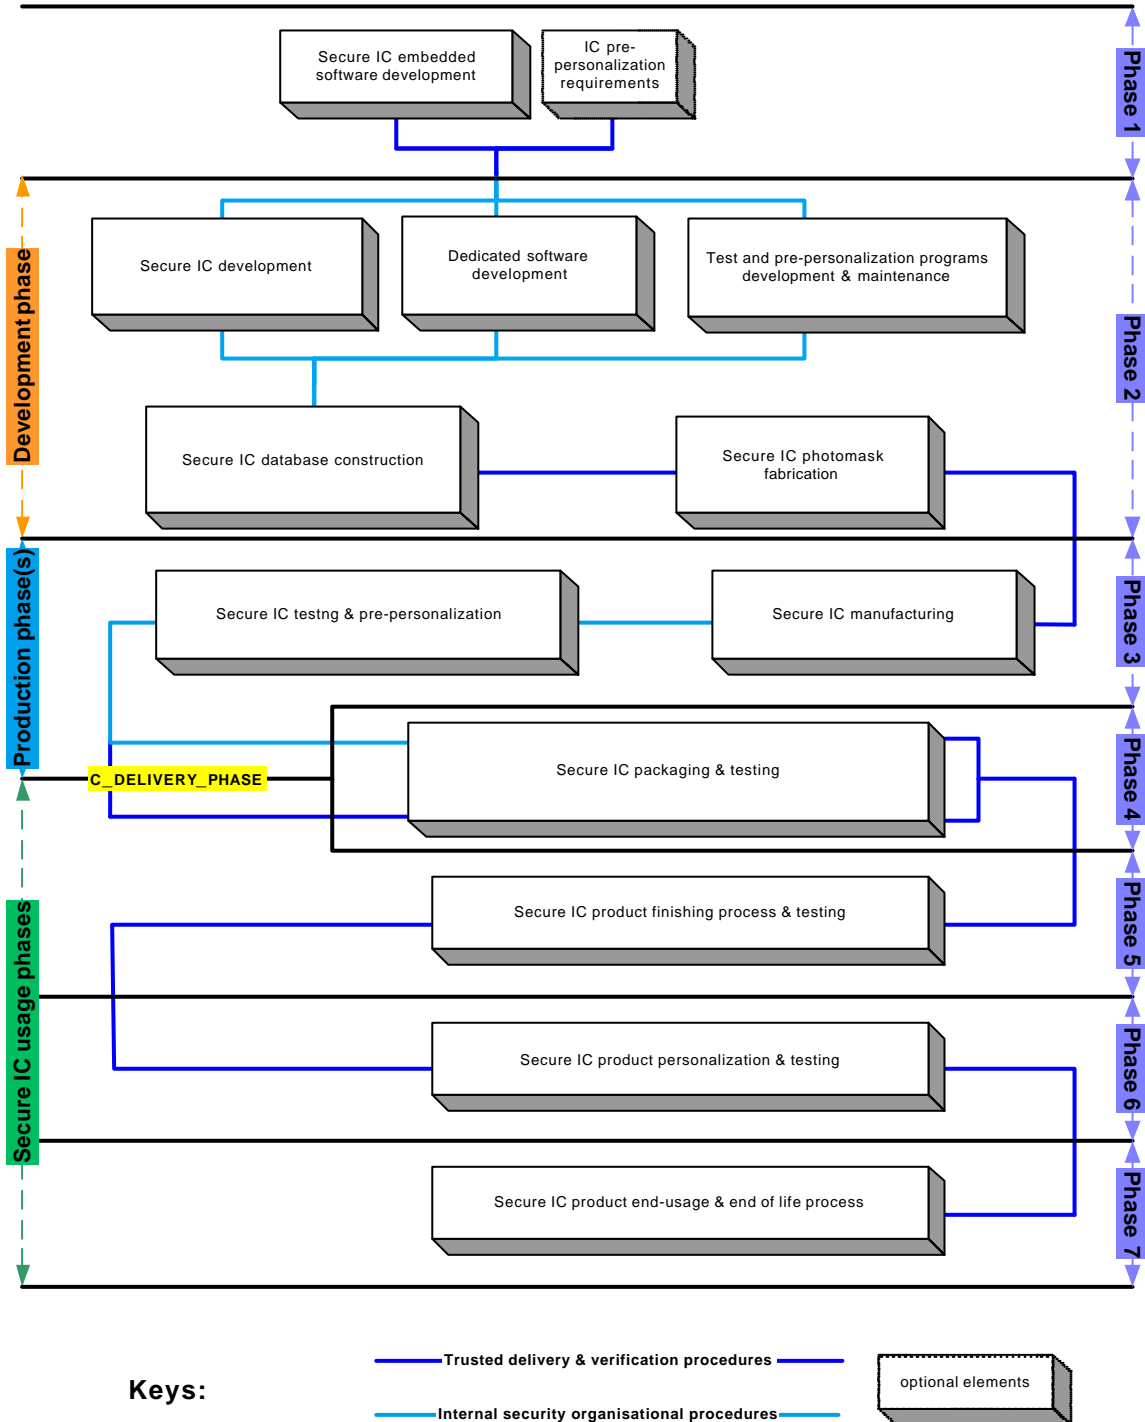

- 28 These different phases may be performed at different sites; procedures on the delivery process of the TOE shall exist and be applied for every delivery within a phase or between phases. This includes any kind of delivery performed from phase 1 to phase 7, including:
- intermediate delivery of the TOE or the TOE under construction within a phase,
 - delivery of the TOE or the TOE under construction from one phase to the next.
- 29 These procedures shall be compliant with the secure usage assumptions [A.DLV_*] developed in Section 3.2.2 of the [PP/9806](#).

2.3 TOE ENVIRONMENT

- 30 Considering the TOE, three types of environments are defined:
- Development environment corresponding to phase 2,
 - Production environment corresponding **to phases 3 up to c_DELIVERY_PHASE**,
 - User environment, **corresponding to phases c_DELIVERY_PHASE + 1 up to 7**.

2.3.1 TOE Development Environment

- 31 The development environment is described in the [PP/9806](#), section 2.3.1.
- 32 This description has been refined in the [ST19X Generic Security Target](#) to include industrial parameters whose definition is reproduced hereafter for readers convenience.
- 33 The development centres actually involved in the development of the TOE are the following : **ST Rousset and ST Ang Mo Kio** for the design activities, **ST Rousset** for the engineering activities and for the software development activities.

2.3.2 TOE Production environment

- 34 The production environment is described in the [PP/9806](#), section 2.3.2.
- 35 This description has been refined in the [ST19X Generic Security Target](#) to include industrial parameters whose definition is reproduced hereafter for readers convenience.
- 36 The authorized front-end plants actually involved in the manufacturing of the TOE are **ST Catania or SMIC**.
- 37 The authorized sub-contractors actually involved in the TOE mask manufacturing are **DPI Corbeil or SMIC**.
- 38 The authorized EWS plant actually involved in the testing of the TOE is **ST Rousset**.

2.3.3 TOE User environment

- 39 The TOE User environment is described in the [PP/9806](#), section 2.3.3.

2.4 TOE LOGICAL PHASES

- 40 During its construction and usage, the TOE is under several life logical phases. These phases are ordered under a logical controlled sequence. The change from one phase to the next **is under control of the TOE**
- 41 The logical phases available on the ST19XL34 are:
- TEST configuration, then
 - ISSUER configuration, then
 - USER configuration.
- 42 Once into a given configuration, the TOE cannot be stepped back to any previous configuration.
- 43 During phases 4 to 6, the TOE may be in ISSUER or USER configuration according to the SICESW developer request.
- 44 [Table 2](#) shows what the different TOE configuration can be facing the authorities who perform the phase activities for phases 4 to 7.

Table 2 TOE configurations

| Phase & condition | TOE Configuration | Authority |
|-----------------------------------|-------------------|--|
| Phase 4 & C_DELIVERY_PHASE = 4 | ISSUER | STM |
| Phase 4 & C_DELIVERY_PHASE = 3 | ISSUER or USER | Packaging manufacturer (not STM) |
| Phase 5 | ISSUER or USER | Secure IC product manufacturer (not STM) |
| Phase 6 | ISSUER or USER | Personalizer (not STM) |
| Phase 7 | USER | End-usage |

2.5 TOE INTENDED USAGE

- 45 The TOE can be incorporated in several applications such as:
- banking and finance market for credit/debit cards, electronic purse (stored value cards) and electronic commerce,
 - network based transaction processing such as mobile phones (GSM SIM cards), pay-TV (subscriber and pay-per-view cards), communication highways (Internet access and transaction processing),
 - transport and ticketing market (access control cards),
 - governmental cards (ID-cards, healthcards, driver licenses etc....),
 - new emerging sectors such as multimedia commerce and Intellectual Property Rights protection.
- 46 The TOE intended usage is further described in the [PP/9806](#), section 2.5.

2.6 General IT features of the TOE

- 47 The TOE IT functionality consist of data storage and processing such as:
- arithmetical functions (e.g. incrementing counters in electronic purses, calculating currency conversion in electronic purses...);
 - data communication;
 - cryptographic operations (e.g. data encryption, digital signature verification...).

3 TOE SECURITY ENVIRONMENT

48 This section describes the security aspects of the environment in which the TOE is intended to be used and addresses the description of the assumptions, the assets to be protected, the threats and the organisational security policies.

3.1 Assets

49 Assets are security relevant elements of the TOE that include:

- the application data of the TOE (such as IC pre-personalization requirements, IC and system specific data),
- the **secure IC** embedded software,
- the IC dedicated software,
- the IC specification, design, development tools and technology.

50 The TOE itself is therefore an asset.

51 Assets have to be protected in terms of confidentiality, **authenticity** and integrity.

52 In the following, unauthorized disclosure of an asset means that an attacker can determine a meaningful part of the asset that leads to a violation of the security policy enforced by the TOE (TSP).

53 In the following, unauthorized modification of an asset means that an attacker can perform an alteration of the asset, meaningful with respect to the security policy enforced by the TOE (TSP), that leads to a violation of the latter.

3.2 Assumptions

54 The assumptions are described in the [PP/9806](#), section 3.2.

3.3 Threats

55 The threats are described in the [PP/9806](#), section 3.3.

3.4 Organisational Security Policies

56 *As some applications to be embedded in the ST19XL34 may require the use of hardware supported cryptography to develop high performance cryptographic operations, the following Organisational Security Policies (OSP) have been defined.*

OSP.SKCS *The Symmetric Key Cryptographic Support provided by the TOE, and its associated documentation, shall enable the SICESW developer to design accurate, efficient and secure cryptographic operations.*

OSP.AKCS *The Asymmetric Key Cryptographic Support provided by the TOE, and its associated documentation, shall enable the SICESW developer to design accurate, preferment and secure cryptographic operations.*

57 *No other Organisational Security Policy (OSP) has been defined in this ST since their specifications depend heavily on the applications in which the TOE will be integrated. The security targets for the applications embedded in these TOE should further define them.*

4 SECURITY OBJECTIVES

- 58 The security objectives of the TOE cover principally the following aspects:
- integrity, **authenticity** and confidentiality of assets,
 - protection of the TOE and associated documentation during development and production phases.

4.1 Security objectives for the TOE

- 59 The TOE shall use state of the art technology to achieve the following IT security objectives:

O.TAMPER The TOE must prevent physical tampering with its security critical parts, *i.e. its TSF*.

O.CLON The TOE functionality needs to be protected from cloning.

O.OPERATE The TOE must ensure the continued correct operation of its security functions.

O.FLAW The TOE must not contain flaws in design, implementation or operation.

O.DIS_MECHANISM The TOE shall ensure that the hardware security mechanisms are protected against unauthorized disclosure.

O.DIS_MEMORY The TOE shall ensure that sensitive information stored in memories **or processed within its TSC** is protected against unauthorized disclosure **by any operational mean (explicit communications, information leakage, bus probing, failure analysis,...)**.

O.MOD_MEMORY The TOE shall ensure that sensitive information stored in memories **or processed within its TSC** is protected against any controlled corruption or unauthorized modification **by any operational mean (explicit communications, operational environment perturbation, physical manipulation, energy and particle exposures, electrical stimulation,...)**.

- 60 Notice that no new security objectives are introduced to cope with the cryptographic support policies, i.e. **OSP.SKCS** and **OSP.AKCS**. The **PP/9806** security objectives for the TOE, **O.DIS_MEMORY** and **O.MOD_MEMORY**, are instead refined to address information processing within the TSF Scope of Control. **O.DIS_MEMORY** requires information confidentiality that addresses both introduced organisational security policies. **O.FLAW** and **O.MOD_MEMORY** require the accurate and faithful information processing demanded by those OSPs.

4.2 Security objectives for the environment

4.2.1 Objectives on phase 1

O.DEV_DIS

STM has procedures to control the sales, distribution, storage and usage of the software and hardware development tools and classified documentation, suitable to maintain the integrity and the confidentiality of the assets of the TOE.

STM ensures that tools are only delivered to the parties authorized personnel.

STM ensures that confidential information such as data sheets and general information on defined assets are only delivered to the parties authorized personnel on the need to know basis.

O.SOFT_DLV

The **secure IC** embedded software must be delivered from the **secure IC** embedded software developer (Phase 1) to **STM** through a trusted delivery and verification procedure that **is** able to maintain the integrity **and authenticity** of the software and its confidentiality, if applicable.

O.SOFT_MECH

To achieve the level of security required by **an application** security target **composed of this security target**, the **secure IC** embedded software shall use IC security features and security mechanisms as specified in the **secure IC** documentation (e.g. **Security Application Manual, Data Sheet, Programming Manual, User Manuals,...**).

O.DEV_TOOLS

The **secure IC** embedded software shall be designed in a secure manner, by using exclusively software development tools (compilers, assemblers, linkers, simulators etc...) and software-hardware integration testing tools (emulators) that will grant the integrity of program and data.

61 The objectives on the remaining phases are described in the [PP/9806](#), sections 4.2.2 to 4.2.6.

5 TOE SECURITY FUNCTIONAL REQUIREMENTS

- 62 The TOE security functional requirements define the functional requirements for the TOE using only functional requirements components drawn from the Common Criteria part 2.
- 63 All extensions to the SFRs of the "[Smartcard Integrated Circuit](#)" Protection Profile (PP) are **exclusively** drawn from the Common Criteria part 2 standard SFRs.
- 64 All iterations on SFRs have been performed according to section 2.1.4. They are easily identified in the following text as they are properly labelled. Iteration labels appear as a suffix of the component standard identifier between square brackets, i.e. "FCC_FFF.e[LABEL]", where "FCC" stands for the functional class, "FFF" stands for the family within that class and "e" stands for the selected component. Dependent components have either the same label as that of the component they depend on, or a label that shares a common prefix with the latter.
- 65 All assignments, selections, or refinements on SFRs have been performed according to section 2.1.4 of Common Criteria part 2. They are easily identified in the following text as they appear **as indicated here**.
- 66 The rules defined by the TOE Security Policy during phase 3 (access control and information flow control Security Functions Policies) **are** different from those prevailing during phases 4 to 7.
- 67 Since the TOE can be in the ISSUER configuration in Phases 4 to 6, as specified in [Table 2](#), the functional requirements applicable only to phase 3 in the PP/9806, are refined into the functional requirements applicable to **the logical phases TEST and ISSUER configurations (TST&ISR, for short)**.
- 68 The minimum strength of function level for the TOE security functions is SOF-high.
- 69 In order to ease the definition and the understanding of these security functional requirements, a simplified presentation of the TOE Security Policy (TSP) is given in the following section. For confidentiality reasons, security attributes and their related policies, TSF data, user data and acceptance/deny rules enforced by the TSF are not described in this document.

5.1 SUBJECTS, OBJECTS, OPERATIONS AND DATA

- 70 This section introduces in turn subjects, objects and operations relevant to the definition of the TSP.

5.1.1 Subjects

- 71 For any given TOE of the ST19X platform, the TSP identifies the following subjects:

S.TRUST STM **trusted process** always activated by a power on (OP.PON) of the TOE. This process exhibits three different behaviours according to the TOE configuration. Please note that this process denotes all the active resources of the TOE controlled by the TSF, not only the executing DSW.

S.PLAIN **Untrusted process** activated by [S.TRUST](#). This process denotes all the active resources of the TOE **not** controlled by the TSF, notably the SICESW in USER configuration.

- S.LIB STM **trusted functional process** activated during a call to execute a service available in the STM library when the TOE is in USER configuration. This process denotes only the executing DSW.
- S.ANY Any human user that can get access to the TOE either locally (i.e. that interacts with the TOE via TOE devices) or remotely (i.e. that interacts with the TOE via another IT product) when the TOE is in any configuration.

5.1.2 Objects and operations

72 For any given TOE of the ST19X platform, the TSP identifies the following objects with their associated operations. For confidentiality reasons, these objects are not completely described here.

- OB.F_IC Secure IC carrying the TOE in any of its forms.
- OB.ROM Any part of the Read Only Memory. These objects contain executable programs and/or data of STM and of the user (ST_ROM & USR_ROM). The latter may also reside in [OB.NVM](#)
- OB.RAM Any part of the Volatile Memory. These objects are used for processing user and TSF dat
- OB.REG Any Register of the TOE. These objects are used to control TOE resources and to exchange data with the secure IC internal subjects.
- OB.NVM Non Volatile Memory that contains user data, TSF data and/or user programs.
- OB.CMD_TST Any command available to the user when the TOE is in TEST configuration.
- OB.CMD_ISR Any command available to the user when the TOE is in ISSUER configuration.
- OB.CALL_USR Any STM library service available to the user when the TOE is in USER configuration.

5.2 FUNCTIONAL REQUIREMENTS APPLICABLE TO TST&ISR

5.2.1 User attribute definition (FIA_ATD.1)

73 The TSF shall maintain the following list of security attributes belonging to individual users:

- ***the TOE configuration,***
- ***the user authentication status***

5.2.2 User identification before any action (FIA_UID.2)

74 The TSF shall require each user to identify itself before allowing any other TSF mediated actions on behalf of that user.

5.2.3 User authentication before any action (FIA_UAU.2)

75 The TOE Security Functions (TSF) shall require each user to be successfully authenticated before allowing any other TSF mediated actions on behalf of that user.

5.2.4 Stored data integrity monitoring (FDP_SDI.1)

76 The TSF shall monitor user data stored within the TSC for ***user ROM or NVM pre-personalization integrity errors*** on all objects, based on the following attributes: ***memory content signature.***

5.3 FUNCTIONAL REQUIREMENTS APPLICABLE TO PHASES 3 TO 7

5.3.1 Security roles (FMT_SMR.1)

77 The TSF shall maintain the ***following*** roles:

- ***TEST administrator: this role allows to perform the test of the TOE in a secure environment.***
- ***ISSUER administrator: this role allows to perform reduced test operations and personalization of the TOE if needed during phases 4 to 6.***
- ***USER: this role has capabilities defined by the SICESW functionality and the STM library services in the DSW. The functionality available to the USER role is dependent on the SICESW, the pre-personalization and the customer mask options.***

78 The TSF shall be able to associate users with roles.

5.3.2 Subset Information Flow Control (FDP_IFC.1[SFP_MNGT])

79 The TOE Security Functions shall enforce the ***SFP.IFC.SFP_MNGT*** on the ***all subjects defined in Section 5.1.1, the content of all objects defined in Section 5.1.2, and the commands available in OB.CMD_TST, OB.CMD_ISR and OB.CALL_USR objects.***

80 The TOE Security Functions shall enforce the **SFP.IFC.USR_CFG** on the *all subjects defined in Section 5.1.1, the content of all objects defined in Section 5.1.2, and all operations that cause controlled information to flow from and to these subjects.*

5.3.3 Simple Security Attributes (FDP_IFF.1)

81 The TOE Security Functions shall enforce the **SFP.IFC.SFP_MNGT** and **SFP.IFC.USR_CFG** based on the following types of subject and information security attribute:

- **subject and object locations and TOE configuration.**

82 The TOE Security Functions shall permit an information flow between a controlled subject and a controlled information via a controlled operation if the following rules hold:

- **In TEST configuration, enforce the rules of SFP.IFC.TST_CFG.**
- **In ISSUER configuration, enforce the rules of SFP.IFC.ISR_CFG.**
- **In USER configuration, enforce the rules of SFP.IFC.USR_CFG.**
- **For confidentiality reasons, other rules are not described here.**

83 The TSF shall provide the additional information flow control SFP rules **SFP.IFC.SKC** and **SFP.IFC.COP**

84 The TSF shall enforce the following additional SFP capabilities : **None.**

85 The TSF shall explicitly authorise an information flow based on the following rules: **None.**

86 The TSF shall explicitly deny an information flow based on the following rules: **None.**

5.3.4 Management of security attributes (FMT_MSA.1)

87 The TSF shall enforce the **SFP.ACC.SFP_MNGT** to restrict the ability to **change from TEST to ISSUER** the **TOE configuration** security attribute to **the TEST administrator.**

88 The TSF shall enforce the **SFP.ACC.SFP_MNGT** to restrict the ability to **change from ISSUER to USER** the **TOE configuration** security attribute to **the ISSUER administrator.**

5.3.5 Static attribute initialisation (FMT_MSA.3)

89 The TSF shall enforce the **SFP.ACC.SFP_MNGT** to provide **restrictive** default values for security attributes that are used to enforce the security function policy.

90 The TSF shall enforce the **SFP.ACC.PACL** to provide **permissive** default values for security attributes that are used to enforce the security function policy.

91 The TSF shall enforce the **SFP.ACC.LOCK** to provide **permissive** default values for security attributes that are used to enforce the security function policy.

92 The TOE Security Functions shall allow the **TEST administrator** and the **ISSUER administrator** to specify alternate initial values to override the default values when an object or information is created.

5.3.6 Complete Access Control (FDP_ACC.2)

- 93 The TOE Security Functions shall enforce the **SFP.ACC.SFP_MNGT** on **all subjects defined in Section 5.1.1 and objects defined in Section 5.1.2** and all operations among subjects and objects covered by the SFP.
- 94 The TOE Security Functions shall enforce the **SFP.ACC.USR_CFG** on **all controlled subjects and objects** and all operations among subjects and objects covered by the SFP.
- 95 The TOE Security Functions shall enforce the **SFP.ACC.MACL** on **all controlled subjects and** OB.ROM, OB.RAM **and** OB.REG **objects** and all operations among subjects and objects covered by the SFP.
- 96 The TOE Security Functions shall enforce the **SFP.ACC.PACL** on **all controlled subjects and** OB.NVM **objects** and all operations among subjects and objects covered by the SFP.
- 97 The TOE Security Functions shall enforce the **SFP.ACC.LOCK** on **all controlled subjects and** OB.NVM **objects** and all operations among subjects and objects covered by the SFP.
- 98 The TOE Security Functions shall enforce the **SFP.ACC.SACL** on **all controlled subjects and** ST_ROM **objects** and all operations among subjects and objects covered by the SFP.
- 99 The TOE Security Functions shall enforce the **SFP.ACC.RACL** on **all controlled subjects and** OB.REG **objects** and all operations among subjects and objects covered by the SFP.
- 100 The TOE Security Functions shall ensure that all operations between any subject in the TOE Scope of Control and any object within the TOE Scope of Control are covered by an access control security functions policy.

5.3.7 Security Attribute based Access Control (FDP_ACF.1)

- 101 The TOE Security Functions shall enforce **SFP.ACC.SFP_MNGT** to objects based on the **TOE configuration**.
- 102 The TOE Security Functions shall enforce **SFP.ACC.USR_CFG** to objects based on **subjects and object locations**.
- 103 The TOE Security Functions shall enforce the **SFP.ACC.MACL** to objects based on **subjects and object locations**.
- 104 The TOE Security Functions shall enforce the **SFP.ACC.PACL** to objects based on **subjects and object locations and page access classes**
- 105 The TOE Security Functions shall enforce the **SFP.ACC.LOCK** to objects based on **page access classes and page access erasing**
- 106 The TOE Security Functions shall enforce the **SFP.ACC.SACL** to objects based on **subjects and object locations and the entry point of the STM library service**
- 107 The TOE Security Functions shall enforce the **SFP.ACC.RACL** on **all controlled subjects and objects locations and the register protection status**

- 108 The TOE Security Functions shall enforce the following rules to determine if an operation among controlled subjects and controlled objects is allowed :
- ***In TEST configuration, enforce the rules of SFP.ACC.TST_CFG.***
 - ***In ISSUER configuration, enforce the rules of SFP.ACC.ISR_CFG.***
 - ***In USER configuration, enforce the rules of SFP.ACC.USR_CFG.***
 - ***For confidentiality reasons, other rules are not described here.***
- 109 The TOE Security Functions shall explicitly authorise access of subjects to objects based on the following additional rules : ***None.***
- 110 The TOE Security Functions shall explicitly deny access of subjects to objects based on additional rules.

5.3.8 Basic internal transfer protection (FDP_ITT.1)

- 111 The TSF shall enforce the ***SFP.IFC.USR_CFG and SFP.IFC.ISR_CFG*** to prevent the ***disclosure*** of user data when it is transmitted between physically-separated parts of the TOE.

5.3.9 Subset residual information protection (FDP_ITT.1)

- 112 The TSF shall ensure that any previous information content of a resource is made unavailable upon ***the allocation of the resource to deallocation of the resource from*** the following objects : OB.RAM ***objects*** and OB.REG ***objects but the illegal condition register of the CRC control register when in warm reset.***

5.3.10 Stored data integrity monitoring and action (FDP_SDI.2)

- 113 The TSF shall monitor user data stored within the TSC for:
- ***single bit fails upon a read operation***
 - ***other actions not described here***
- 114 ***in OB.NVM*** on all objects, based on the following attributes: ***redundancy data.***

5.3.11 TSF Generation of secrets (FIA_SOS.2)

- 115 The TSF shall provide a mechanism to generate secrets that meet ***the NIST FIPS PUB-140-2:1999 standard for a Security Level 3 cryptographic module (statistical test upon demand).***
- 116 The TSF shall be able to enforce the use of TSF generated secrets for ***SF_ALEA_A and SF_OBS_A.***

5.3.12 Potential Violation Analysis (FAU_SAA.1)

- 117 The TOE Security Functions shall be able to apply a set of rules in monitoring the audited events and based upon these rules indicate a potential violation of the TOE Security Policy.
- 118 The TOE Security Functions shall enforce the following rules for monitoring audited events:

- a) Accumulation or combination of auditable events *in ISSUER and USER configurations, resulting from:*
- *operating changes by the environment,*
 - *access control violation attempts,*
 - *bad NVM or CPU usages,*
- known to indicate a potential security violation;
- b) ***Make these indications available to the user after a warm reset.***

5.3.13 Unobservability (FPR_UNO.1)

119 ***In this security target, ability to observe an operation means revealing the value of a data during an operation on this data.***

- 120 The TOE Security Functions shall ensure that ***all end-users*** are
- unable to observe the operation ***read*** on ***OB.ROM, OB.RAM, OB.REG and OB.NVM*** by ***S.TRUST and S.LIB.***
 - unable to observe the operation ***write*** on ***OB.RAM*** by ***S.TRUST and S.LIB.***
 - unable to observe the operation ***program or erase*** on ***OB.NVM*** by ***S.TRUST and S.LIB.***

5.3.14 Notification of physical attack (FPT_PHP.2)

- 121 The TOE Security Functions shall provide unambiguous detection of physical tampering that might compromise the TOE Security Functions
- 122 The TOE Security Functions shall provide the capability to determine whether physical tampering with the TOE security function's devices or elements has occurred.
- 123 For the ***clock and voltage supply operating changes by the environment in ISSUER and USER configurations***, the TOE security functions shall monitor the devices and elements and notify the ***ISSUER administrator or the USER*** when physical tampering with the TOE security functions devices has occurred.

5.3.15 Resistance to physical attack (FPT_PHP.3)

- 124 The TOE Security Functions shall resist ***operating changes by the environment and physical integrity tampering***, to the ***clock and voltage supply*** by responding automatically such that the TOE security policy is not violated.
- 125 Note: as described in the CC part 2 annexes, technology limitations and relative physical exposure of the TOE must be considered.

5.4 FUNCTIONAL REQUIREMENTS APPLICABLE TO USER CONFIGURATION

5.4.1 Cryptographic operation (FCS_COP.1)

- 126 The TSF shall perform :
- ***Encryption and decryption in Electronic Code Book (ECB) mode*** in accordance with a specified cryptographic algorithm :

- **the Data Encryption Standard (DES), and cryptographic key sizes of 56 effective bits,**
- **the Triple Data Encryption Standard (3DES) and cryptographic key sizes of 112 effective bits,**
- **that meet the following standards: ISO 8372:1987, ISO 8731-1:1987 and ISO/IEC 10116:1997.**
- **Encryption and decryption in Cipher Block Chaining (CBC) mode and compute a Message Authentication Code (MAC) in accordance with a specified cryptographic algorithm :**
 - **the Data Encryption Standard (DES), and cryptographic key sizes of 56 effective bits,**
 - **the Triple Data Encryption Standard (3DES) and cryptographic key sizes of 112 effective bits,**
- **that meet the following standards: ISO 8372:1987, ISO 8731-1:1987 and ISO/IEC 10116:1997.**
- **RSA recovery (encryption) in accordance with a specified cryptographic algorithm, Rivest, Shamir & Adleman's algorithm, and cryptographic key sizes multiples of 64 bits up to 1088 bits or cryptographic key sizes multiples of 64 bits larger than 1088 bits and up to 2176 bits that meet the following standards: ISO/IEC 9796-2:1997 and MIT/LCS/TR-212.**
- **RSA signature (decryption) without the Chinese Remainder Theorem in accordance with a specified cryptographic algorithm, Rivest, Shamir & Adleman's algorithm, and cryptographic key sizes multiples of 64 bits up to 1088 bits or cryptographic key sizes multiples of 64 bits larger than 1088 bits and up to 2176 bits that meet the following standards: ISO/IEC 9796-2:1997 and MIT/LCS/TR-212.**
- **Secure hash function in accordance with a specified cryptographic algorithm, revised Secure Hash Algorithm (SHA-1), and result size of 160 bits on chained blocks of 512 bits that meet the following standards: NIST FIPS PUB 180-1:1995 and ISO/IEC 10118-3:1998.**

5.4.2 Subset Information Flow Control (FDP_IFC.1)

- 127 The TOE Security Functions shall enforce the **SFP.IFC.SKC** on **the DSW cryptographic libraries (S.LIB), user keys and cryptographic sensitive data (UD.KEY, UD.CSD) for the SKC operations specified in the iterations FCS_COP.1[SKC_*] of the FCS_COP.1 component.**
- 128 The TOE Security Functions shall enforce the **SFP.IFC.COP** on **the DSW cryptographic libraries (S.LIB), user keys and cryptographic sensitive data (UD.KEY, UD.CSD) for the cryptographic operations specified in all iterations of components of the cryptographic support class (FCS*[COP*] selected.**

5.4.3 Simple Security Attributes (FDP_IFF.1)

- 129 The TOE Security Functions shall enforce the **SFP.IFC.SKC** based on the following types of subject and information security attribute:
- **the entry point of the STM library service.**
- 130 The TOE Security Functions shall permit an information flow between a controlled subject and a controlled information via a controlled operation if the following rules hold:

- **source and destination recipients must be authorised objects when loading and unloading SFP.IFC.SKC controlled information via SFP.IFC.SKC controlled operations.**
- **source and destination recipients must be authorised objects when loading and unloading SFP.IFC.COP controlled information via SFP.IFC.COP controlled operations.**

131 The TSF shall enforce the following additional SFP capabilities: **None**.

132 The TSF shall explicitly authorise an information flow based on the following rules: **None**.

133 The TSF shall explicitly deny an information flow based on the following rules: **None**.

5.4.4 Partial elimination of illicit information flows (FDP_IFF.4)

134 The TSF shall :

- enforce the **SFP.IFC.SKC** to limit the capacity of **electrical power consumption variations to a HODPA SOF high resistance level**.
- enforce the **SFP.IFC.COP** to limit the capacity of **electrical power consumption variations and electromagnetic emanation variations to a SPA and EMA SOF high resistance level**.

135 The TSF shall :

- prevent **electrical power consumption variations revealing SFP.IFC.COP controlled information thereby being DPA and HODPA proof**.
- prevent **electrical power consumption and electromagnetic emanation variations revealing SFP.IFC.SKC controlled information thereby being SPA, DPA and EMA proof**.
-

5.4.5 Cryptographic key generation (FCS_CKM.1)

136 The TSF shall generate cryptographic keys in accordance with a specified cryptographic key generation algorithm :

- **Random number generation** and specified cryptographic key sizes of **1088 bits** that meet the following standards **NIST FIPS PUB-140-2:1999 for a security level 3 cryptographic module (statistical test on demand)**
- **Prime and RSA primes generation algorithm**, and specified cryptographic key sizes **multiples of 64 bits up to 1088 bits** that meet the following **standards: NIST FIPS PUB-140-2:1999, ISO/IEC 9796-2:1997, NIST FIPS PUB 186, JoCSS and JoNT**
- **RSA public and private keys computation algorithm**, and specified cryptographic key sizes **multiples of 64 bits greater than 128 bits and up to 2176 bits** that meet the following **standards: NIST FIPS PUB-140-2:1999, ISO/IEC 9796-2:1997 and MIT/LCS/TR-212**.

6 TOE SECURITY ASSURANCE REQUIREMENTS

137 The assurance requirements **are** EAL4 augmented of additional assurance components listed in the following sections.

138 **The components introduced by the PP/9806** are hierarchical to the components specified in EAL4.

139 The components introduced by this Security Target are either hierarchical to those of the PP/9806 (ADV_FSP.3), or required to satisfy a dependency on either an additional SFR (AVA_CCA.1) or the maintenance of assurance class (ALC_FLR.1).

6.1 ASE: Security Target evaluation class

140 Although it is not explicitly required by the PP/9806, this class of security assurance requirements, not detailed here (see ISO/IEC 15408-3:1999), aims at establishing that this Security Target is complete, consistent, technically sound and hence suitable for use as the basis of the corresponding TOE evaluations.

6.2 ADV_FSP.3 Semiformal functional specification

Dependencies:

141 ADV_RCR.1.

Developer actions elements:

142 The developer shall provide a functional specification.

Content and presentation of evidence elements:

143 The functional specification shall describe the TSF and its external interfaces using a **semiformal** style, **supported by informal, explanatory text where appropriate**.

144 The functional specification shall be internally consistent.

145 The functional specification shall describe the purpose and method of use of all external TSF interfaces, providing complete details of all effects, exceptions and error messages.

146 The functional specification shall completely represent the TSF.

147 The functional specification shall include rationale that the TSF is completely represented.

Evaluator action elements:

148 The evaluator shall confirm that the information provided meets all requirements for content and presentation of evidence.

149 The evaluator shall determine that the functional specification is an accurate and complete instantiation of the TOE security functional requirements.

6.3 ADV_IMP.2 Implementation of the TSF

Developer actions elements:

150 The developer shall provide the implementation representation for the entire TOE security functions.

Content and presentation of evidence elements:

151 The implementation representation shall unambiguously define the TOE security functions to a level of detail such that the TOE security functions can be generated without further design decisions.

152 The implementation representation shall be internally consistent.

153 The implementation representation shall describe the relationships between all portions of the implementation.

Evaluator action elements:

154 The evaluator shall confirm that the information provided meets all requirements for content and presentation of evidence.

155 The evaluator shall determine that the implementation representation is an accurate and complete instantiation of the TOE security functional requirements.

6.4 ALC_DVS.2 Sufficiency of security measures

Developer actions elements:

156 The developer shall produce development security documentation.

Content and presentation of evidence elements:

157 The development security documentation shall describe all the physical, procedural, personnel, and other security measures that are necessary to protect the confidentiality and integrity of the TOE design and implementation in its development environment.

158 The development security documentation shall provide evidence that these security measures are followed during the development and maintenance of the TOE.

159 The evidence shall justify that the security measures provide the necessary level of protection to maintain the confidentiality and integrity of the TOE.

Evaluator action elements:

160 The evaluator shall confirm that the information provided meets all requirements for content and presentation of evidence.

161 The evaluator shall confirm that the security measures are being applied.

6.5 ALC_FLR.1 Basic flaw remediation

Dependencies:

162 No dependencies.

Developer actions elements:

163 The developer shall document the flaw remediation procedures.

Content and presentation of evidence elements:

- 164 The flaw remediation procedures documentation shall describe the procedures used to track all reported security flaws in each release of the TOE.
- 165 The flaw remediation procedures shall require that a description of the nature and effect of each security flaw be provided, as well as the status of finding a correction to that flaw.
- 166 The flaw remediation procedures shall require that corrective actions be identified for each of the security flaws.
- 167 The flaw remediation procedures documentation shall describe the methods used to provide flaw information, corrections and guidance on corrective actions to TOE users.

Evaluator action elements:

- 168 The evaluator shall confirm that the information provided meets all requirements for content and presentation of evidence.

6.6 AVA_VLA.4 Highly resistant**Developer actions elements:**

- 169 The developer shall perform and document an analysis of the TOE deliverables searching for ways in which a user can violate the TOE security policy.
- 170 The developer shall document the disposition of identified vulnerabilities.

Content and presentation of evidence elements:

- 171 The documentation shall show, for all identified vulnerabilities, that the vulnerability cannot be exploited in the intended environment for the TOE.
- 172 The documentation shall justify that the TOE, with the identified vulnerabilities, is resistant to obvious penetration attacks.
- 173 The evidence shall show that the search for vulnerabilities is systematic.
- 174 The analysis documentation shall provide a justification that the analysis completely addresses the TOE deliverables.

Evaluator action elements:

- 175 The evaluator shall confirm that the information provided meets all requirements for content and presentation of evidence.
- 176 The evaluator shall conduct penetration testing, building on the developer vulnerability analysis, to ensure the identified vulnerabilities have been addressed.
- 177 The evaluator shall perform an independent vulnerability analysis.
- 178 The evaluator shall perform independent penetration testing, based on the independent vulnerability analysis, to determine the exploitability of additional identified vulnerabilities in the intended environment.
- 179 The evaluator shall determine that the TOE is resistant to penetration attacks performed by an attacker possessing a high attack potential.

6.7 AVA_CCA.1: Covert channel analysis**Dependencies:**

180 ADV_FSP.2, ADV_IMP.2, AGD_ADM.1, AGD_USR.1.

Developer actions elements:

181 The developer shall conduct a search for covert channels for each information flow control policy.

182 The developer shall provide covert channel analysis documentation.

Content and presentation of evidence elements:

183 The analysis documentation shall identify covert channels and estimate their capacity.

184 The analysis documentation shall describe the procedures used for determining the existence of covert channels, and the information needed to carry out the covert channel analysis.

185 The analysis documentation shall describe all assumptions made during the covert channel analysis.

186 The analysis documentation shall describe the method used for estimating channel capacity, based on worst case scenarios.

187 The analysis documentation shall describe the worst case exploitation scenario for each identified covert channel.

Evaluator action elements:

188 The evaluator shall confirm that the information provided meets all requirements for content and presentation of evidence

189 The evaluator shall confirm that the results of the covert channel analysis show that the TOE meets its functional requirements

190 The evaluator shall selectively validate the covert channel analysis through testing

7 TOE SUMMARY SPECIFICATION

7.1 STATEMENT OF TOE SECURITY FUNCTIONS

191 The following security functions are an abstraction of the TOE Functional Specification.

7.1.1 SF_INIT_A: Hardware initialisation & TOE attribute initialisation

192 In TEST, ISSUER and USER configurations, this functionality ensures the following:

- the TOE starts running in a secure state,
- the TOE is securely initialised,
- the reset operation is correctly managed.

7.1.2 SF_CONFIG_A : TOE configuration switching and control

193 In TEST , ISSUER and USER configurations, this functionality ensures the switching and the control of TOE configuration.

194 This functionality ensures that the TOE is either in TEST, ISSUER or USER configuration.

195 The only authorised TOE configuration modifications are:

- TEST to ISSUER configuration by TEST administrator,
- ISSUER to USER configuration by ISSUER administrator.

196 This functionality is responsible for the TOE configuration detection and notification to the other resources of the TOE.

7.1.3 SF_INT_A: TOE logical integrity

197 This functionality is responsible for the following operations, performed according to actual TOE configuration:

- NVM, USR_ROM integrity content verifications in TEST and ISSUER configurations
- ST_ROM integrity content verifications in TEST configuration,
- valid CPU usage and stack overflow verification in TEST, ISSUER and USER configurations.
- for correcting single bit fails upon a read operation
- other actions not described here

198 This functionality is responsible for reporting to SF_ADMINIS_A detected errors on CPU usage, stack overflow and EEPROM.

7.1.4 SF_TEST_A: Test of the TOE

199 This functionality is responsible for restricting access of the TOE TEST functionality to the TEST administrator in TEST configuration.

- 200 This functionality is responsible for restricting access of the TOE ISSUER functionality to the ISSUER administrator in ISSUER configuration.
- 201 In USER configuration, this functionality ensures that neither TOE TEST nor TOE ISSUER functionality can be accessed.
- 202 In TEST configuration, this functionality ensures the test of TOE functionality with respect to the IC specification

7.1.5 SF_AUTH_A: Administrator's authentication

- 203 In TEST configuration, this SF ensures that the only allowed TOE user is a TEST administrator.
- 204 In ISSUER configuration, this SF ensures that the only allowed TOE user is a ISSUER administrator.
- 205 A **SOF-high** strength of function is claimed for this SF.

7.1.6 SF_FWL_A: Storage and Function Access Firewall

- 206 TOE memories are partitioned. This partitioning is partially defined by the TOE user and partially imposed by STM:
- ST_ROM mapping is STM defined,
 - USR_ROM mapping is user defined,
 - RAM and NVM mappings are partly STM defined and partly user defined.
- 207 In TEST, ISSUER and USER configurations, this security functionality monitors:
- Access from memory locations to other locations for ROM, RAM and NVM,
 - NVM use,
 - Register access,
- and is responsible for the notification of violation attempts to SF_ADMINIS_A.
- 208 An access can be:
- a read, to registers, ROM, RAM or NVM,
 - a write, to registers or RAM,
 - a program, to NVM,
 - an erase, to NVM.
- 209 Executability, Read, Write, Program and Erase right classes are defined by the user and STM for ROM, RAM and NVM.

7.1.7 SF_PHT_A: Physical tampering security function

- 210 In TEST, ISSUER and USER configurations, this functionality ensures the following:
- the TOE detects clock and voltage supply operating changes by the environment,

- the TOE detects attempts to violate its physical integrity,
- the TOE is always clocked with shape and timing within specified operating conditions.

7.1.8 SF_ADMINIS_A : Security violation administrator

211 In TEST, ISSUER and USER configurations, this functionality ensures the management of security violations attempts.

212 The security violations attempts which are managed are:

- Access to unavailable or reserved memory locations,
- Unauthorised access to user's memories,
- Unauthorised access to STM memories,
- Bad CPU usage,
- Bad NVM usage,
- EEPROM single bit fails
- Clock and voltage supply operating changes
- TOE physical integrity abuse.

7.1.9 SF_OBS_A: Unobservability

213 In ISSUER and USER configurations, this security function addresses the [Unobservability \(FPR_UNO.1\)](#) and the Basic internal transfer protection (FDP_ITT.1) security functional requirements expressed in this document.

7.1.10 SF_SKCS_A: Symmetric Key Cryptography Support

214 In USER configuration, this security function implements the following standard symmetric key cryptography algorithms:

- Data Encryption Standard (DES) with 64 bits long keys (56 effective bits).

215 This functionality supports the following standard modes of operation, both for encryption and for decryption:

- DES by itself,
- Triple DES, chaining two DES encryption and one DES decryption.

216 Each of these modes of operation can be chained in the standard Cipher Block Chaining mode (CBC). In the encryption operation mode, this function can compute either a 64 bits long Message Authentication Code (MAC) or the encrypted data.

7.1.11 SF_AKCS_A: Asymmetric Key Cryptography Support

217 In USER configuration, this security function implements the following standard asymmetric key cryptography algorithms:

- RSA verification (encryption) with an RSA module up to 1088 bits,

- RSA verification (encryption) with an RSA module up to 2176 bits,
 - RSA signature (decryption) without the Chinese Remainder Theorem (CRT), with an RSA module up to 1088 bits,
 - RSA signature (decryption) with the Chinese Remainder Theorem (CRT), with an RSA module up to 2176 bits,
 - RSA secret and public keys computation with an RSA module up to 2176 bits,
 - Prime number and RSA prime number generation up to 1088 bits, with Rabin-Miller primality tests.
- 218 In USER configuration, this security function implements the following standard hash function:
- SHA-1 hash function chaining blocks of 512 bits to get a 160 bits result.

7.1.12 SF_ALEAS_A: Unpredictable Number Generation Support

- 219 In all configurations, this security function provides two unpredictable and unrelated 8 bits numbers.
- 220 In ISSUER and USER configurations, this security function supports the prevention of information leakage.
- 221 This security function ensures the generation of unpredictable numbers of 1088 bits, in USER configuration.
- 222 This security function can be qualified with the test metrics required by the [NIST FIPS PUB-140-2:1999](#) standard for a Security Level 3 cryptographic module (statistical test upon demand).

7.2 STATEMENT OF ASSURANCE MEASURES

- 223 The [ST19X Documentation Report](#) shows the assurance measures, through a list of documents delivered, which are claimed to satisfy the stated assurance requirements.

8 PP CLAIMS

8.1 PP References

224 The ST19XL34 Generic Security Target **is compliant with** the requirements of the [Smartcard Integrated Circuit Protection Profile PP/9806, Revision 2.0](#).

8.2 PP Refinements

225 The main refinements operated on the PP are:

- "Smartcard product" is refined into "Secure IC based product" to emphasize the packaging independence of the TOE,
- The product life-cycle is refined to include industrial parameters such as the delivery phase and the sites where the life-cycle processes are performed,
- Two security objectives for the TOE are refined to address the introduced organisational security policies, namely [O.DIS_MEMORY](#) and [O.MOD_MEMORY](#),
- The SFR applicable to phase 3 are refined to be applicable to the logical phases TEST and ISSUER configurations,
- The "subset information flow control" SFR (FDP_IFC.1) and the corresponding "simple security attributes" SFR (FDP_IFF.1) are refined to be applicable to the whole TOE.

226 In Chapters [2](#), [3](#), [4](#) and [6](#), and in , PP refinements are indicated with typesetting text **as indicated here**, original text being typeset [as indicated here](#). Deleted parts are ~~[as indicated here](#)~~.

8.3 PP Additions

227 Two organisation security policies are added to provide hardware supported cryptography to users, namely [OSP.SKCS](#) and [OSP.AKCS](#).

228 There are no additional objectives to those described in the [PP/9806](#).

229 A simplified presentation of the TOE Security Policy (TSP) is added.

230 The following SFRs are added to the PP:

- **FDP_ITT.1Basic internal transfer protection**, dependent on [FDP_ACC.1 or FDP_IFC.1],
- **FDP_RIP.1Subset residual information protection**, no dependencies,
- **FDP_SDI.2Stored data integrity monitoring and action**, no dependencies,
- **FIA_SOS.2TSF Generation of secrets**, no dependencies,
- **FCS_COP.1Cryptographic operation**, dependent on [FDP_ITC.1 or FCS_CKM.1], FCS_CKM.4, FMT_MSA.2,
- **FCS_CKM.1Cryptographic key generation**, dependent on [FCS_CKM.2 or FCS_COP.1], FCS_CKM.4, FMT_MSA.2,

- **FDP_IFF.4**Partial elimination of illicit information flows, dependent on AVA_CCA.1, FDP_IFC.1.

231

The following SARs are added to the PP:

- **ADV_FSP.3**Semiformal functional specification, dependent on ADV_RCR.1,
- **ALC_FLR.1**Basic flow remediation, no dependencies,
- **AVA_CCA.1**Covert channels analysis, dependent on ADV_FSP.2, ADV_IMP.2, AGD_ADM.1, AGD_USR.1,

9 RATIONALE

- 232 The rationale has been established for the whole ST19X platform and has been presented and evaluated in the [ST19X Generic Security Target](#).
- 233 For confidentiality reasons, the rationale is not reproduced here.

10 REFERENCES

234 Protection Profile reference

| Component description | Reference | Revision |
|------------------------------|-----------|----------|
| Smartcard Integrated Circuit | PP/9806 | 2.0 |

235 Standards references

| Identifier | Description |
|--------------------------|---|
| NIST FIPS PUB-140-2:1999 | Security Requirements for Cryptographic Modules |
| NIST FIPS PUB 180-1:1995 | Secure Hash Standard |
| NIST FIPS PUB 186 | Recommended simplified Rabin-Miller primality tests for DSS |
| ISO 8372:1987 | Information processing - Modes of operation for a 64-bit block cipher algorithm |
| ISO 8731-1:1987 | Banking - Approved algorithms for message authentication -Part 1: DEA |
| ISO/IEC 9796-2:1997 | Information technology - Security techniques - Digital signature scheme giving message recovery - Part 2: Mechanism using a hash function |
| ISO/IEC 9797:1994 | Information technology - Security techniques - Data integrity mechanism using a cryptographic check function employing a block cipher algorithm |
| ISO/IEC 10116:1997 | Information technology - Modes of operation of an n-bit block cipher algorithm |
| ISO/IEC 10118-3:1998 | Information technology - Security techniques - Hash functions - Part 3: Dedicated hash functions |
| ISO/IEC 15408-1:1999 | Information technology - Security techniques - Evaluation criteria for IT security - Part 1: Introduction and general model |
| ISO/IEC 15408-2:1999 | Information technology - Security techniques - Evaluation criteria for IT security - Part 2: Security functional requirements |
| ISO/IEC 15408-3:1999 | Information technology - Security techniques - Evaluation criteria for IT security - Part 3: Security assurance requirements |
| CC RA | Arrangement on the Recognition of Common Criteria certificates in the field of Information Technology Security, May 2000 |
| MIT/LCS/TR-212 | On digital signatures and public key cryptosystems, Rivest, Shamir & Adleman Technical report MIT/LCS/TR-212, MIT Laboratory for computer sciences, January 1979 |
| JoCSS | Riemann's hypothesis and tests for primality, Miller Journal of computer and system sciences, vol 13 n°3 p300-317 |
| JoNT | Probabilistic algorithm for testing primality, Miller Journal of number theory, vol 12 n°1 p 128-138 |

Annex A Glossary

Authentication data

Information used to verify the claimed identity of a user.

Authorised user

A user who may, in accordance with the TSP, perform an operation.

Cryptographic Sensitive Data (CSD)

User data appearing in plain text or otherwise unprotected form and whose disclosure or modification can compromise the security of a cryptographic module or the security of the information protected by the module.

Differential Power Analysis (DPA)

An analysis in variations of the electrical power consumption of a device, using advanced statistical methods and/or error correction techniques, for the purpose of extracting information correlated to secrets processed in the device. When several consumption traces are recombined during analysis to remove randomisation counter-measures, the analysis is known as Higher Order DPA (HODPA).

Embedded software

Software embedded in a **secure IC** may be **located** in any part of the nonvolatile memory (**ROM and NVM**) of the IC.

Secure IC based product

Packaged secure IC integrated in its end-usage carrier such as a Smartcard, a card reader, a set-top box, a PC board or any other suitable device.

Integrated Circuit (IC)

Electronic component(s) designed to perform processing and/or memory functions.

IC Dedicated Software

STM proprietary Dedicated SoftWare (DSW), embedded in ST_ROM, whose design is parameterised by the STM product assembly definition. This software contributes to the enforcement of the TSP. It also includes testing functionality and system libraries that are part of the API of the TOE, it is embedded in the IC (it is also known as IC firmware).

IC developer

Institution (or its agent) responsible for the IC development.

IC manufacturer

Institution (or its agent) responsible for the IC manufacturing, testing, and pre-personalization.

IC packaging manufacturer

Institution (or its agent) responsible for the IC packaging and testing.

IC pre-personalization data

Any data that is stored in the nonvolatile memory for shipment between phases.

Memory access

Read and Modification (Write, Erase, Program) access.

Object

An entity within the TSC that contains or receives information and upon which subjects perform operations.

Packaged IC

IC embedded in a physical package such as micromodules, DIPs, SOICs or TQFPs.

Personalizer

Institution (or its agent) responsible for the **secure IC based product** personalization and final testing.

Secret

Information that must be known only to authorised users and/or the TSF in order to enforce a specific SFP.

Secure IC Embedded SoftWare (SICESW)

Embedded software in charge of generic functions of the **secure IC** such as Operating System, general routines and interpreters (**secure IC** basic software) and embedded software dedicated to the applications (**secure IC** application software).

Secure IC embedded software developer

Institution (or its agent) responsible for the **secure IC** embedded software development and the specification of IC pre-personalization requirements, *if any*.

Security attribute

Information associated with subjects, users and/or objects that is used for the enforcement of the TSP.

Security derivation

The process by which a TOE summary specification is derived from the identification of the threatened assets in the TOE environment, establishing in turn: a security environment, a set of security objectives, a set of security requirements and finally a set of security functions and assurance measures (see CC, part 1, section 4.3 for a detailed explanation, notably figure 4.5).

Sensitive information

Any information identified as a security relevant element of the TOE such as:

- the application data of the TOE (such as IC pre-personalization requirements, IC and system specific data),

- the secure IC embedded software,
- the IC dedicated software,
- the IC specification, design, development tools and technology.

Simple Power Analysis (SPA)

A direct analysis, primarily visual, of patterns of instruction execution (or execution of individual instructions), obtained through monitoring the variations in electrical power consumption of a device, for the purpose of revealing the features and implementations of (cryptographic) algorithms and subsequently the values of the secrets they process in the device.

Smartcard

A card according to ISO 7816 requirements which has a non volatile memory and a processing unit embedded within it.

Software library

Set of software functions provided by STM in the DSW that implement driving and functional services offered to the embedded software of the secure IC based product.

Subject

An entity within the TSC that causes operations to be performed.

System integrator

Institution (or its agent) responsible for the **secure IC based** product system integration (terminal software developer, system developer ...).

TSF data

Data created by and for the TOE, that might affect the operation of the TOE.

User

Any entity (human user or external IT entity) outside the TOE that interacts with the TOE.

User data

Data created by and for the user, that doesn't affect the operation of the TOE.

Warm reset

Reset operation on the TOE without lowering power under the Power on Reset (POR) level.

Annex B Abbreviations

AKC

Asymmetric Key Cryptography

ANSI

American National Standards Institute

API

Application Program Interface.

CSD

Cryptographic Sensitive Data.

CC

Common Criteria *Version 2.1 (ISO-15408)*.

CFG

Configuration

COP

Coprocessing

CPU

Central Processing Unit.

DES

Data Encryption Standard.

DPA

Differential Power Analysis.

DSW

IC Proprietary Dedicated Software.

EAL

Evaluation Assurance Level.

EEPROM

Electrically Erasable Programmable Read Only Memory.

EMA

Electromagnetic Analysis.

FIPS

Federal Information Processing Standard.

HODPA

Higher Order Differential Power Analysis.

IOCI

Input Output and Control Interface.

ISO

International Standards Organisation.

IT

[Information Technology](#).

LOCK

Lock of Page Attribute

MACL

Memory Access Control Logic

MAP

Modular Arithmetical Processor.

NIST

National Institute of Standards and Technology.

NVM

Non Volatile Memory.

OP

Operation Performed.

OSP

Organisational Security Policy.

PACL

Page Access Control Logic

PC

Program Counter register.

PP

Protection Profile.

PUB

Publication Series.

RACL

Register Access Control Logic

RAM

Random Access Memory.

ROM

Read Only Memory.

SAR

Security Assurance Requirement.

SF

Security function.

SFP

Security Function Policy.

SFP_MNGT

Management of Policies

SFR

Security Functional Requirement.

SICESW

Secure IC Embedded SoftWare.

SKC

Symmetric Key Cryptographic

SOF

Strength of function.

SP

Stack Pointer register.

SPA

Simple Power Analysis.

ST

Security Target.

ST_ROM

STM reserved ROM.

STM

STMicroelectronics.

TOE

Target of Evaluation.

TSC

TSF Scope of Control.

TSF

TOE Security Functions.

TSFI

TSF Interface.

TST&ISR

The logical phases TEST and ISSUER configurations.

TSP

TOE Security Policy.

TSS

TOE Summary Specification.

USR_ROM

User reserved ROM.

CONFIDENTIALITY OBLIGATIONS:

THIS DOCUMENT CONTAINS NO SENSITIVE INFORMATION.

ITS DISTRIBUTION IS NOT SUBJECT TO THE SIGNATURE OF AN NON-DISCLOSURE AGREEMENT (NDA).

IT IS CLASSIFIED **PUBLIC**

FURTHER COPIES CAN BE PROVIDED, PLEASE CONTACT
YOUR LOCAL ST SALES OFFICE OR THE FOLLOWING ADDRESS:

STMicroelectronics SA

SMARTCARD PRODUCTS MARKETING DPT

BP2 / ZI de Peynier Rousset / F-13106 ROUSSET Cedex / FRANCE

Fax: +33 442688729

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without the express written approval of STMicroelectronics.

© 2004 STMicroelectronics - Printed in France - All Rights Reserved
BULL CP8 Patents

STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - France - Germany - Italy - Japan - Korea - Malaysia - Malta -
Morocco - The Netherlands - Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A.

www.st.com

